


USED ON 1ST 48m FROM CHINA

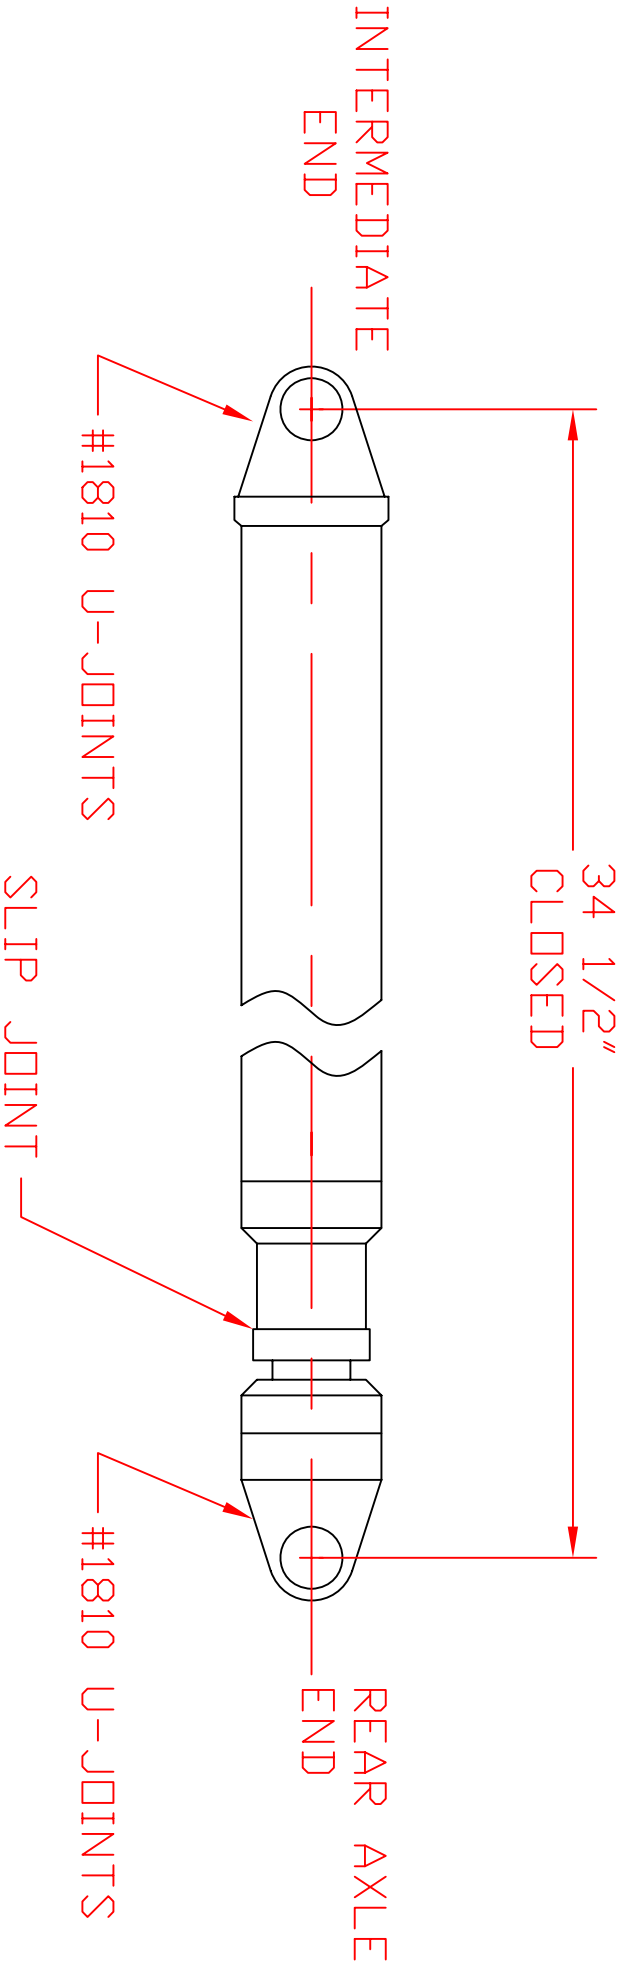

- NOTES:
- 1. AFTER WELD DRIVE LINE MUST BE DINAMICLY BALANCED.

				DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.		<div>TOLERANCES: .XX .030 .XXX .010 FRACTION 1/32 ANGLE 1/2° BREAK ALL SHARP EDGES .010 MAX. x 45 ALL MACHINED SURFACES UNLESS OTHERWISE SPECIFIED</div>	
REV	DATE	DESCRIPTION OF CHANGE	BY	DRAWN	CT	11/08	THIS DRAWING IS THE PROPERTY OF REED MANUFACTURING AND IS LOANED WITHOUT CONSIDERATION OTHER THAN THE BORROWER'S AGREEMENT THAT IT SHALL NOT BE REPRODUCED, COPIED, LOANED, OR DISPOSED OF, DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED.
REVISIONS							
				TITLE			CONCRETE PLACING EQUIPMENT CHIND, CA 91710
				DRIVE SHAFT REAR, 48m WITH 309LR TRANS.			
				MATERIAL			
				PART NUMBER			803291-1
				REV			
				SHEET 1 OF 1			