
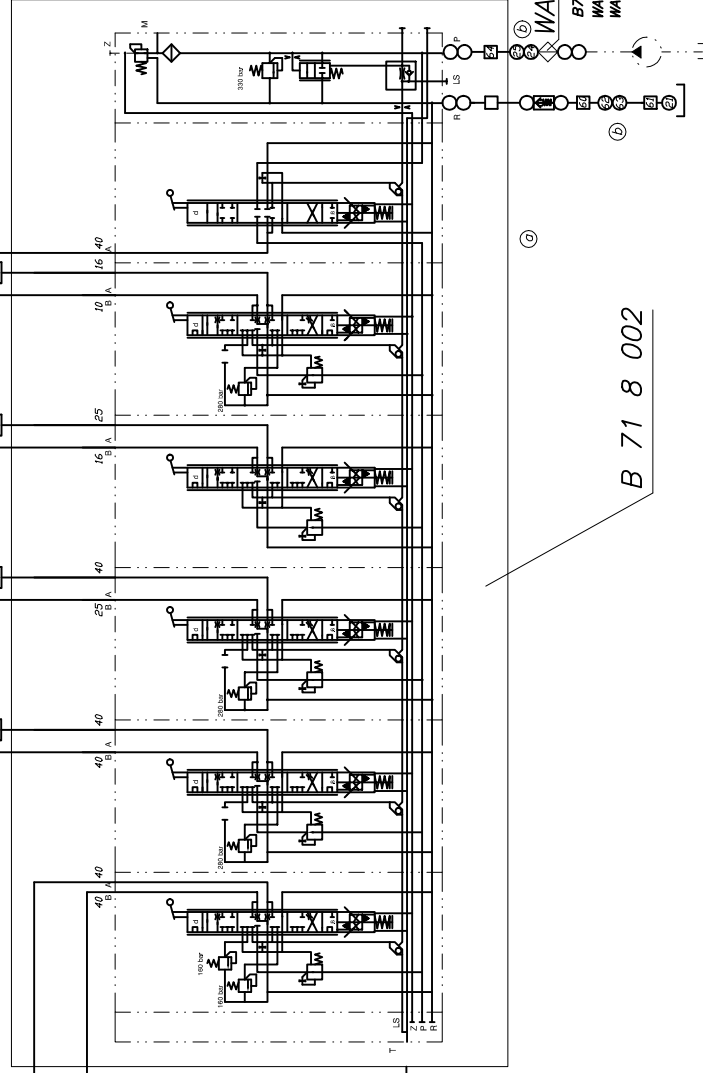
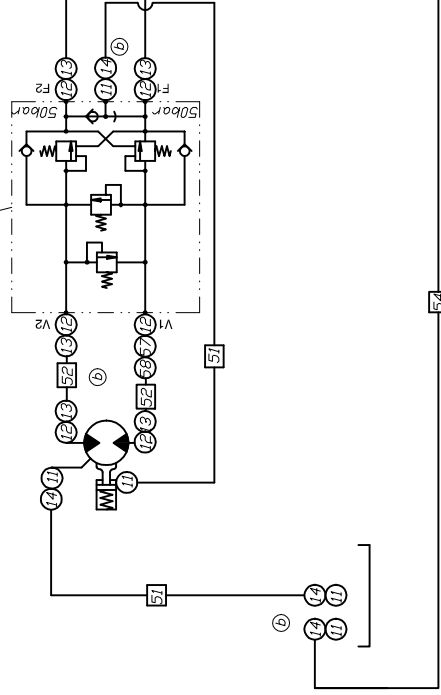




A diagram showing a cable suspended between two points. The cable is divided into four segments by three intermediate points labeled A, B, C, and D. The segments are labeled A, B, C, and D. The cable is shown as a series of connected line segments. The points A, B, C, and D are marked with dots. The cable is shown in a sagging position, with the lowest point being point A.

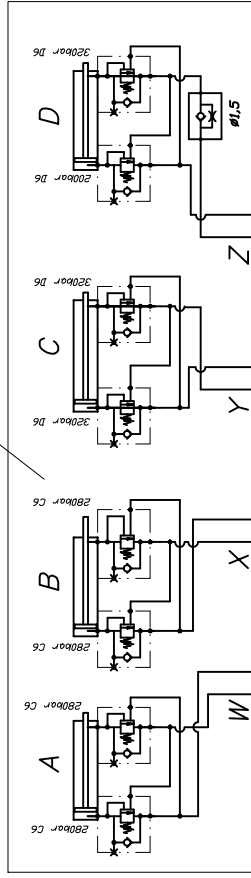

WAI 106303

B741022 (1x)
WAI103178 (3x)
WAI102070 (3x)

B 71 8 002

③ 1x lose in Werkzeugkasten

 Wälzlinger Baumaschinen GmbH	Freinadtoleranz DIN 7168 mittel			Maßstab 1:1		Gewicht 00 N	
Verrohrungsplan Mast 36m							
Änderung nur auf CAD			B 71 8 001				
Umgang:			Stm. RPr		Stm. elektr		Blatt
7 a	Rechnung a	Datum 12.03.08	K.Ü./Stm a				
6 a	Rechnung a	Datum 12.03.08	K.Ü./Stm a				

Ohne unsere Genehmigung darf diese Zeichnung weder vervielfältigt noch dritten Personen oder Konkurrenzfirmen mitgeteilt werden. (Paragraph 1 Nr.3 des Urheberrechtsgesetzes vom 14.06.1901)