


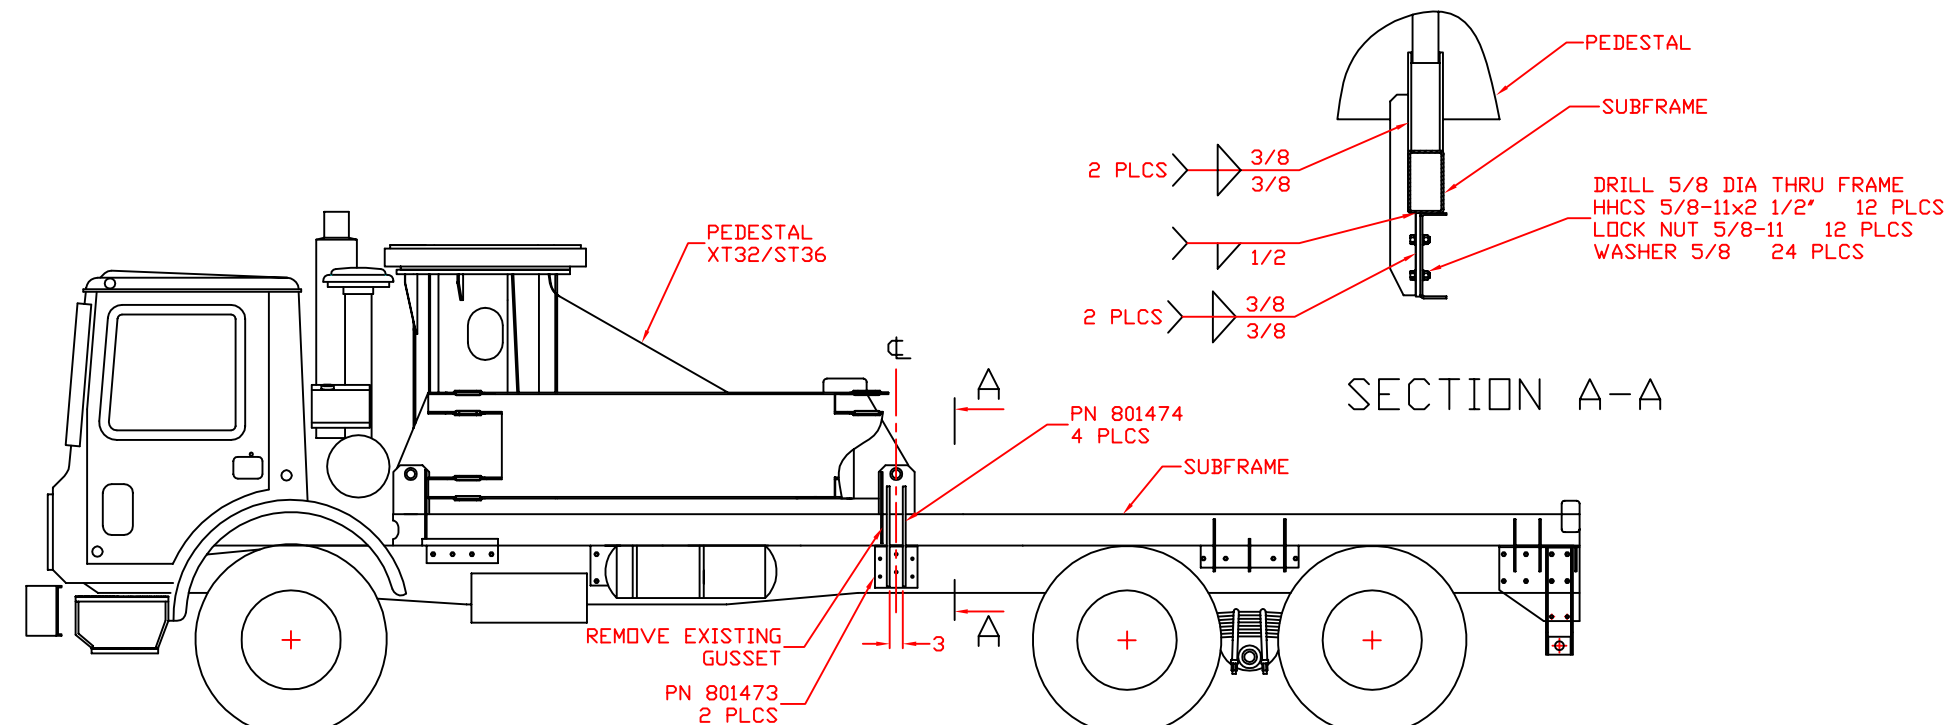

- NOTES:
1. GRIND AND REPAIR ANY WELD CRACKS BEFORE INSTALLING REINFORCEMENT.
 2. USE E7018 ELECTRODE. WELD VERTICAL PASSES UP. USE ROOT PASS AND TWO FINISH PASSES.
 3. REINFORCEMENT TYPICAL FOR BOTH SIDE OF PEDESTAL.

				UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:			REED CONCRETE PLACING EQUIPMENT		
				FRACT	DECIMAL	ANGLE	WALNUT, CA 91789		
				1/32	.030	1/2"			
				DO NOT SCALE DRAWING			TITLE		
							PEDESTAL MOUNTING REINFORCEMENT		
				CE	BY	DATE	MATERIAL		PART NUMBER
				DRAWN	SK	9/2/99	THIS DRAWING IS THE PROPERTY OF REED MANUFACTURING AND IS LOANED WITHOUT CONSIDERATION OTHER THAN THE BORROWER'S AGREEMENT THAT IT SHALL NOT BE REPRODUCED, COPIED, LOANED, OR DISPOSED OF, DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED.		801475
LTR	DATE	ENGINEERING CHANGE NOTICE #	BY	REVISIONS			APPVD		SHEET __ OF __