

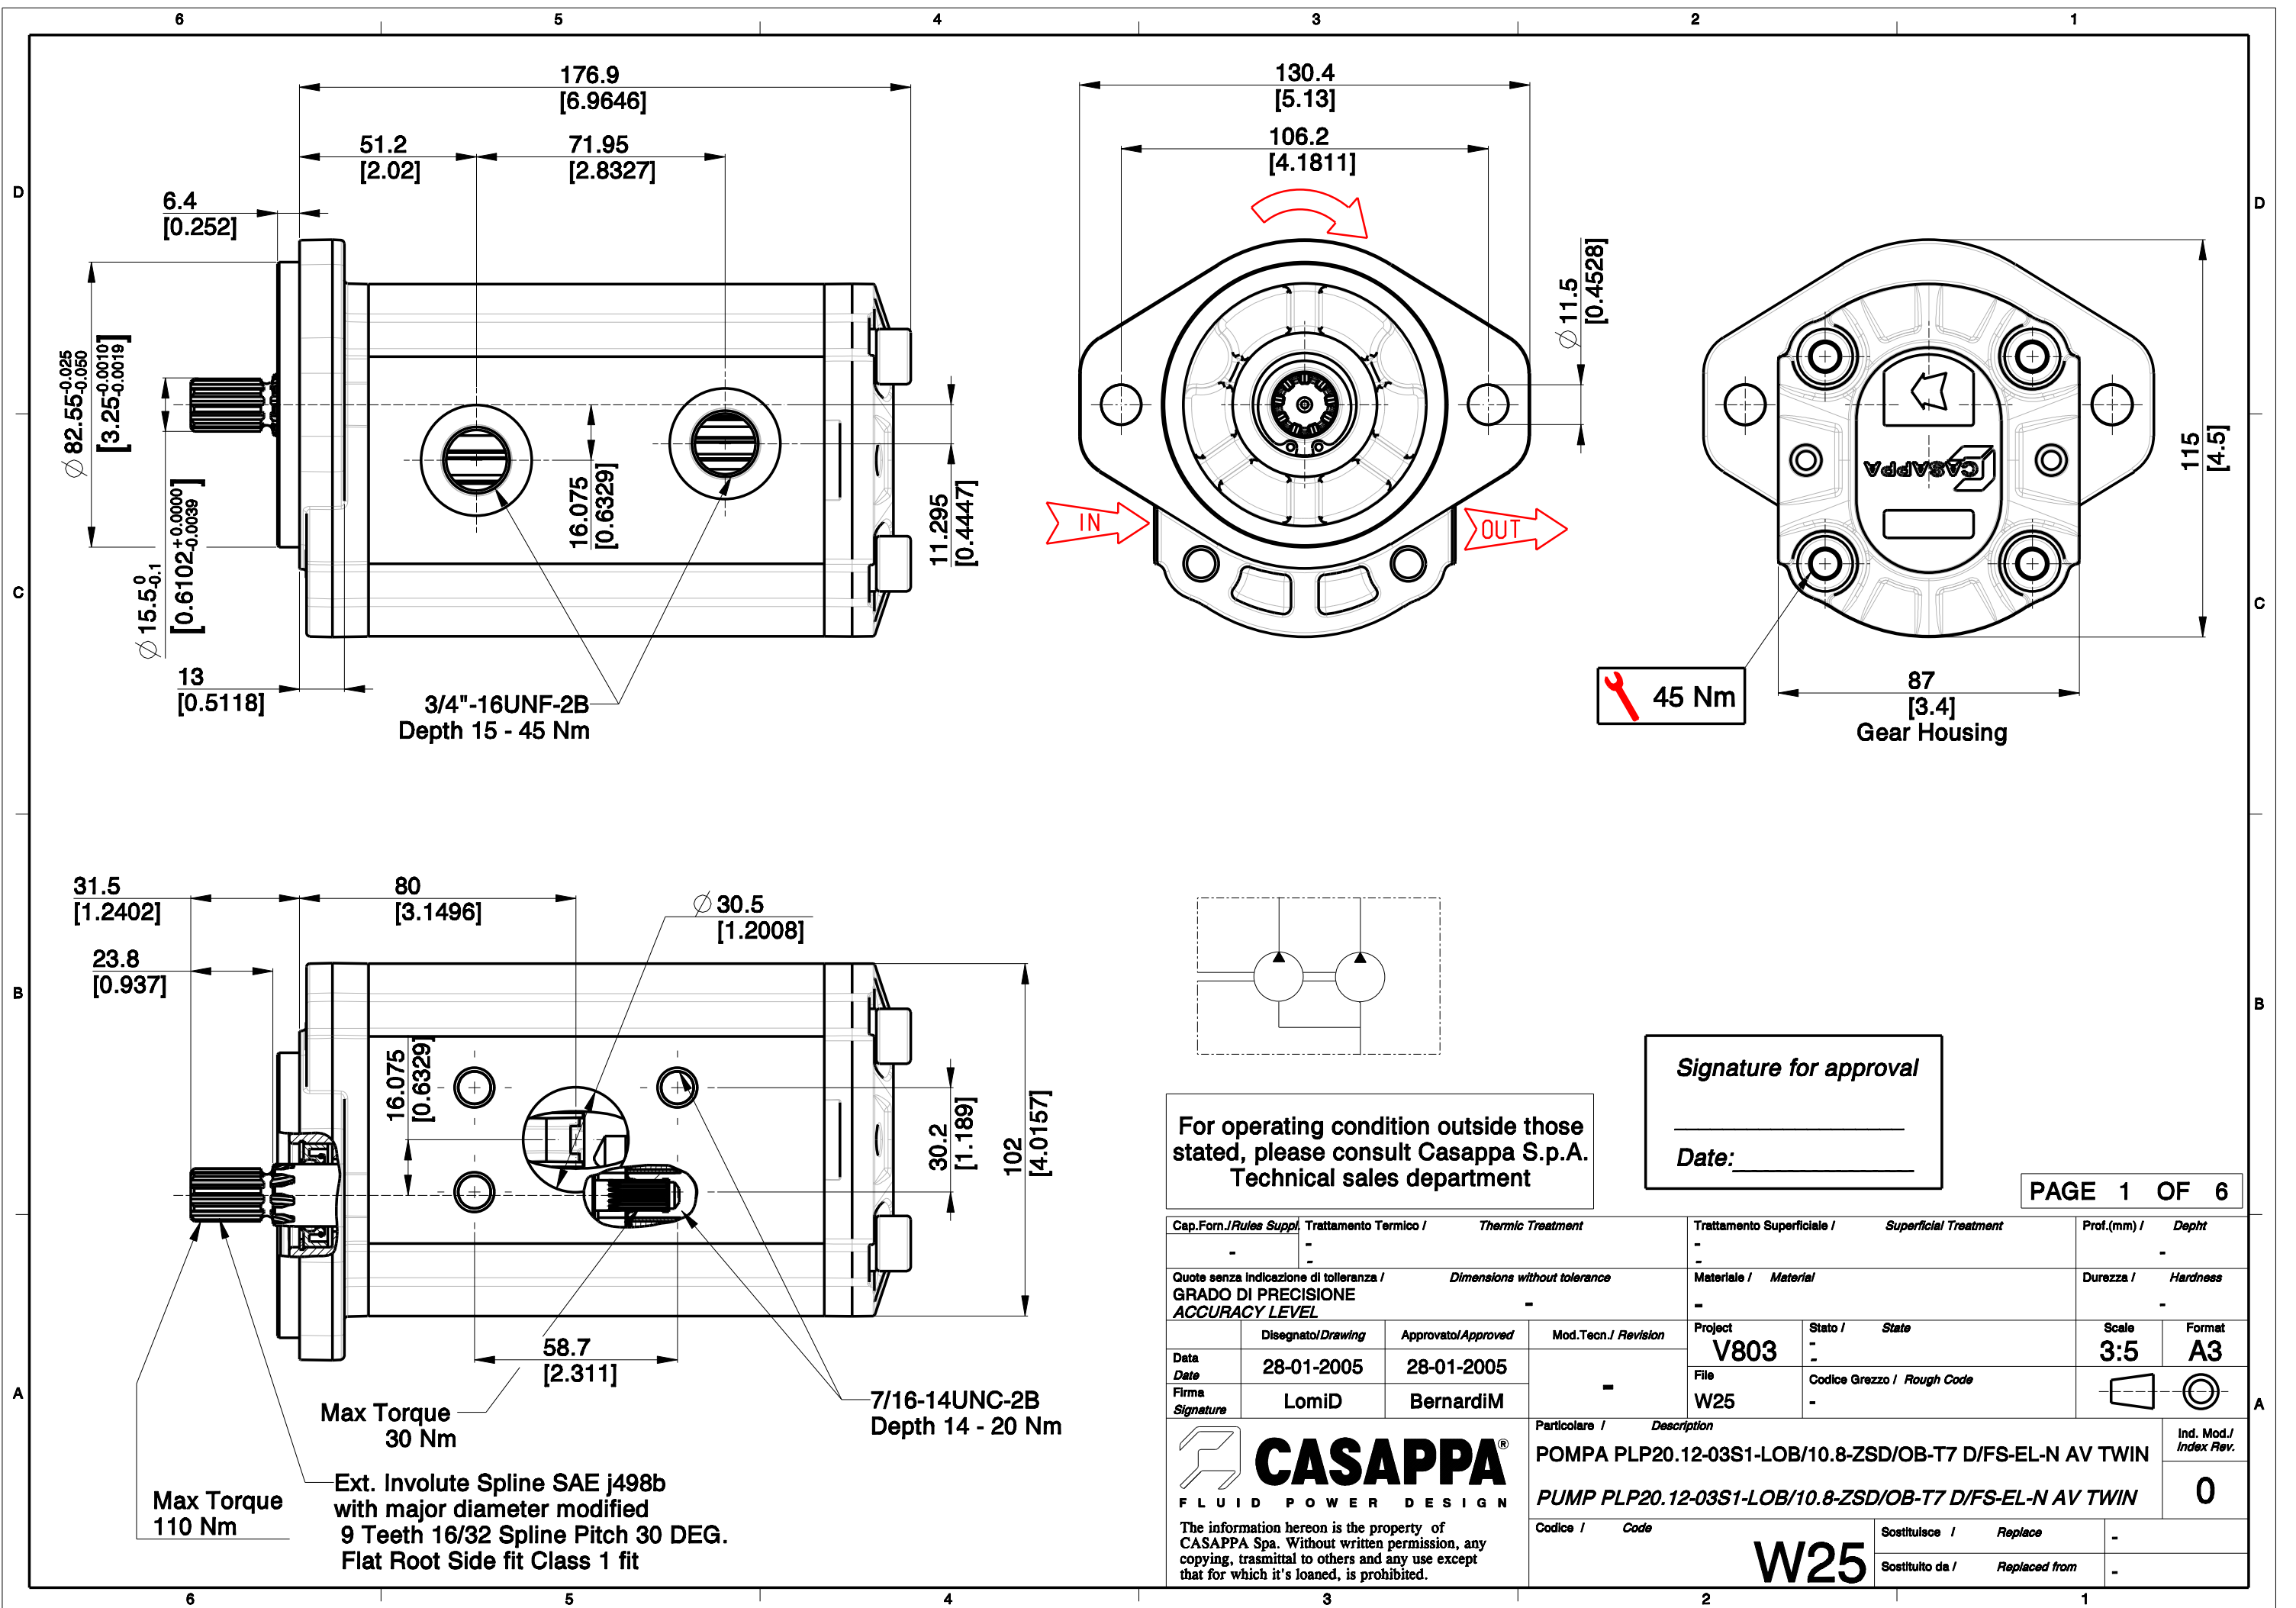


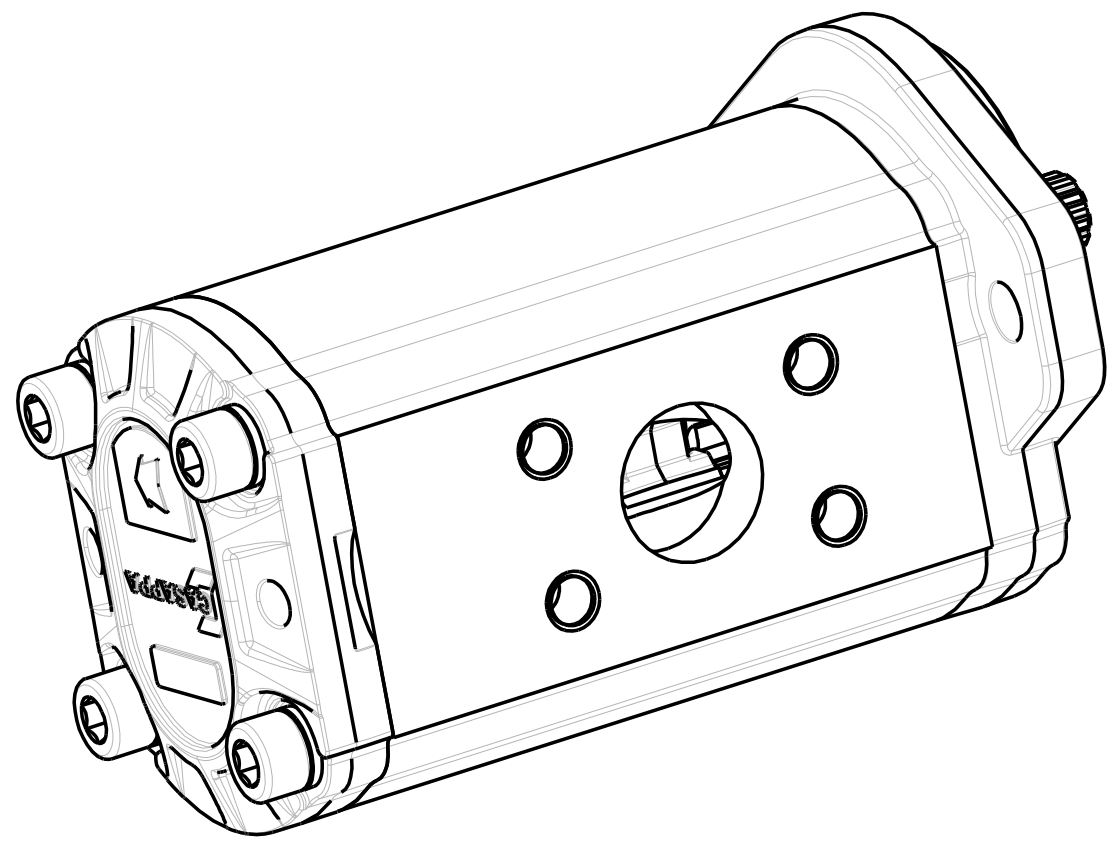

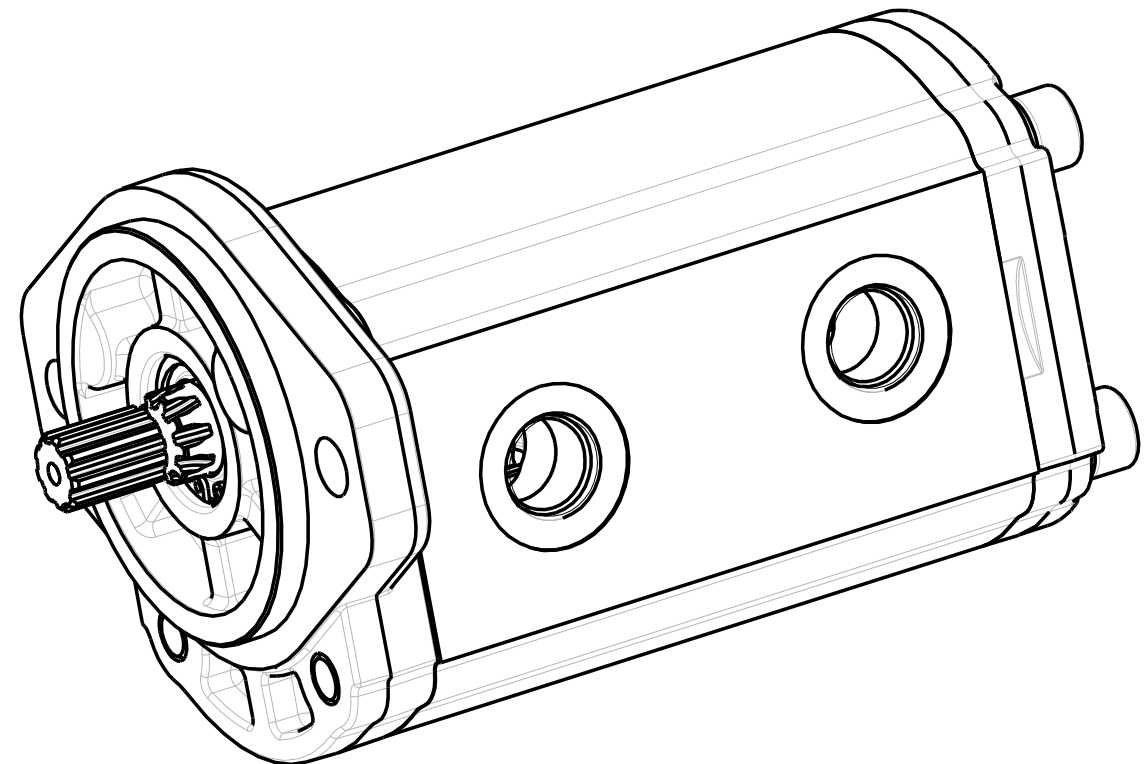

PUMP DATA		I PUMP	II PUMP
Senso di rotazione (guardando l'albero conduttore) Direction of rotation (looking on drive shaft)		Destro (D) Clockwise (D)	
Cilindrata - Displacement		0,742 [in3/rev]	0,519 [in3/rev]
Campo pressione di alimentazione per pompe Inlet pressure range for pump		10 - 43 [psi abs.]	
Pressione max continua - Max continuous pressure	P1	3771 [psi]	2611 [psi]
Pressione max intermittente - Max intermittent pressure	P2	4061 [psi]	2901 [psi]
Pressione max picco - Max peak pressure	P3	4351 [psi]	3046 [psi]
Velocità - Speed	min P1	600 [min ⁻¹]	
	max P1	3500 [min ⁻¹]	
Guarnizioni - Seals type		NBR	
Temperatura di esercizio - Operating temperature		-13 to + 176 [F]	
Campo di viscosità - Viscosity range	recommended	12 to 100 mm ² /s (cSt)	
	permitted	max 750 mm ² /s (cSt)	
Classe di contaminazione - Contamination class	$\Delta p > 200$ bar $\beta x = 75 - 10 \mu m$	8 - Nas 1638	
		19/17/14 - ISO 4406	
	$\Delta p < 200$ bar $\beta x = 75 - 25 \mu m$	10 - Nas 1638	
Codice del prototipo - Prototype code		PRT04145	
Codice cliente - Customer code		87153	
Valvola di massima pressione - Relief valve		-	
Pressione di stand-by valvola LS - Stand-by pressure LS valve		-	
Peso - Weight		4.230 [kg]	
Vernice - Painting		-	
Trattamenti speciali - Special treatment		-	

For operating condition outside those stated, please consult Casappa S.p.A. Technical sales department

Signature for approval

Date:

Cap.Forn./Rules Suppl.		Trattamento Termico / Thermic Treatment		Trattamento Superficiale / Superficial Treatment		Prof.(mm) / Depht		
-		-		-		-		
Quote senza indicazione di tolleranza / Dimensions without tolerance				Materiale / Material		Durezza / Hardness		
GRADO DI PRECISIONE ACCURACY LEVEL				-		-		
	Disegnato/Drawing	Approvato/Approved	Mod.Tecn./ Revision	Project	Stato / State	Scale	Format	
Data Date	28-01-2005	28-01-2005	-	V803	-	7:10	A3	
Firma Signature	LomiD	BernardiM		File	Codice Grezzo / Rough Code			
 CASAPPA® FLUID POWER DESIGN The information hereon is the property of CASAPPA Spa. Without written permission, any copying, trasmittal to others and any use except that for which it's loaned, is prohibited.			Particolare / Description					Ind. Mod./ Index Rev.
			POMPA PLP20.12-03S1-LOB/10.8-ZSD/OB-T7 D/FS-EL-N AV TWIN					0
			PUMP PLP20.12-03S1-LOB/10.8-ZSD/OB-T7 D/FS-EL-N AV TWIN					
			Codice / Code		Sostituisce / Replace		-	
		Sostituito da / Replaced from		-				
				W25				



CASAPPA[®]
FLUID POWER DESIGN

The information hereon is the property of CASAPPA Spa. Without written permission, any copying, trasmittal to others and any use except that for which it's loaned, is prohibited.

W25